




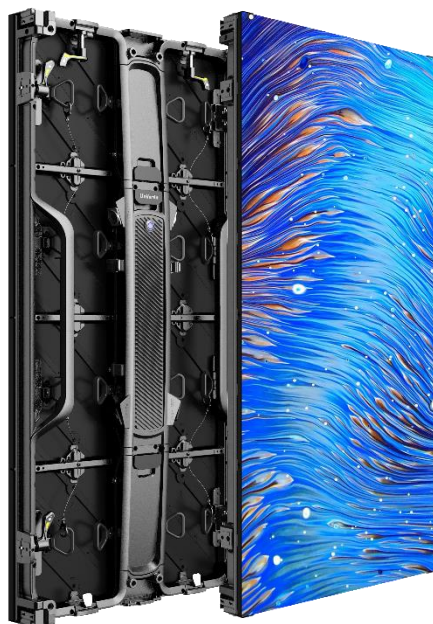


## URM III Series

### URM III 05 Pro BF

#### Product features:

- Click-lock — true single-person installation.
- Automatic — comprehensive corner protection.
- Curve range — (Convex)  $-10^{\circ} \sim +10^{\circ}$  (Concave)
- Pinch n' go module — high efficiency of screen maintenance

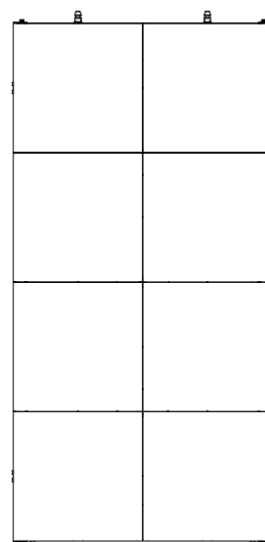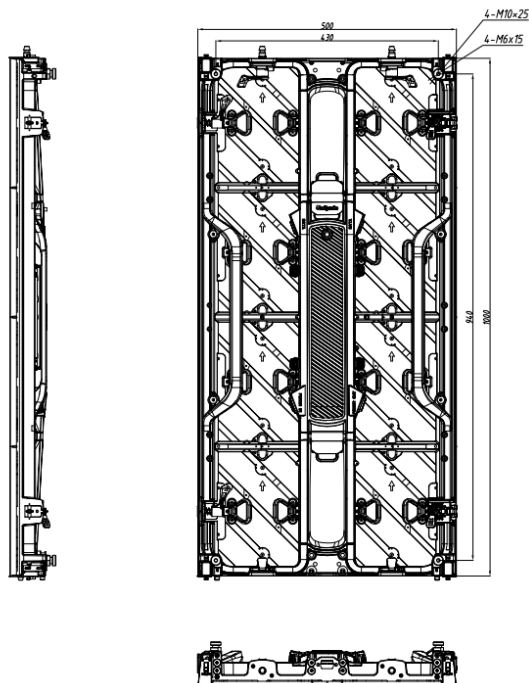

## Main Technical Specifications:

| Parameter                    | URM III 05 Pro BF             |
|------------------------------|-------------------------------|
| Pixel Pitch                  | 5.9mm                         |
| LED Type                     | 3-in-1 Black SMD              |
| Brightness                   | 4,200 cd/m <sup>2</sup>       |
| Pixel Density                | 28,224 pixels/m <sup>2</sup>  |
| Pixels Per Panel             | 84×168 pixels                 |
| Module Size                  | W250mm×H250mm                 |
| Panel Size                   | W500mm×H500mm×D71mm           |
| Weight                       | 13.2 kg/panel                 |
| Maintenance                  | Rear                          |
| Ingress Protection           | IP65                          |
| Curve                        | (Convex) -10°~+10°(Concave)   |
| Aspect Ratio                 | 1:2                           |
| Panel Area                   | 0.5 m <sup>2</sup>            |
| Recommended Viewing Distance | ≥5.9m                         |
| Environment                  | Outdoor                       |
| Material                     | Die-cast Aluminum             |
| Calibration                  | Support Brightness and Chroma |
| Brightness Control           | Manual/Automatic              |
| Color Temperature            | 2,000K~9,300K Adjustable      |
| Horizontal Viewing Angle     | 140°                          |
| Vertical Viewing Angle       | 120°                          |
| Contrast Ratio               | 6,000:1                       |
| Input Power <Max>            | 420 W/panel                   |
| Input Power <Typical>        | 150 W/panel                   |
| Input Voltage                | 100~240 VAC                   |
| Processing Depth             | 16 bit                        |

|                                 |                      |
|---------------------------------|----------------------|
| Scan Method                     | 1/7                  |
| Refresh Rate                    | 7,680@60 Hz          |
| Video Frame Rate                | 23~240 Hz            |
| Input Power Frequency           | 50~60 Hz             |
| LED Life Time                   | 100,000 Hours        |
| Operating Temperature/Humidity  | -20°C~+50°C/10~90%RH |
| Storage Temperature/Humidity    | -20°C~+55°C/10~60%RH |
| Standard Mounting Configuration | Hanging, Stacking    |
| Certification                   | TUV-CE/CB/FCC/IC/UL  |

**Note:**

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin' s internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.