









UslimIII

Integrated & Creative Indoor LED Display
—Diverse Shapes, Unlimited Creativity

- | | |
|--|--|
|  Multi-Function Screen |  Internal Cableless |
|  Dust-Resistant Surface |  Ultra Slim & Light |
|  Front & Rear Serviceable |  Creative Shapes |
|  Signal & Power Dual Backup |  5760 - 7680Hz Refresh Rate |





FEATURES

- **Versatile Brightness Options:** Ideal for indoor and semi-outdoor use.
- **Smooth Viewing:** 5760 - 7680Hz refresh rate for an impressive experience.
- **Convenient Access:** Front & rear installation/maintenance.
- **Integrated Design:** Resilient and stable.
- **Customizable Splicing:** Flexible and creative configurations.
- **Dust-Resistant Surface:** Ensures clarity and performance.
- **Support HDR:** Restores video effects for enhanced visuals.*

*optional

APPLICATIONS

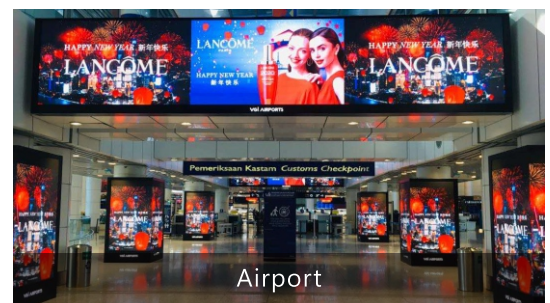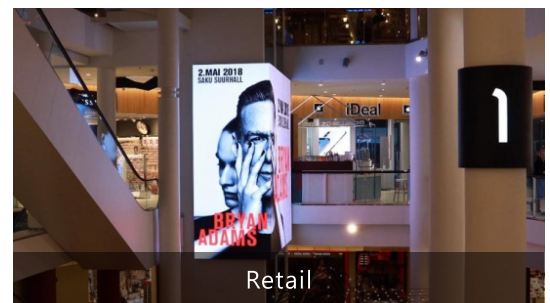

SPECIFICATIONS

Parameter	Value			
Series	UslimIII			
Pixel pitch	1.5mm	1.9mm	2.5mm	3.9mm
Cabinet size	500×1000/500×500/500×250/250×500/250×750/750×250mm×40mm			
Weight	10.5/4.5/3.5kg/panel			
Brightness	800	900	1000	900
Contrast ratio	5000:1	6500:1	5000:1	10000:1
Refresh rate	5760Hz	7680Hz	7680Hz	7680Hz
Max power consumption	480W/m²	440W/m²	450W/m²	440W/m²
Certification	CE/CB/EMC ClassB/CCC/UL/BIS476-1/RoHS2.0			

DIMENSIONS

