




UsportR Series

Stadium Ribbon UsportR6

Product Features:

- 106.5mm Light & Slim Panel
- Efficient & Convenient Top Installation & Maintenance
- Power & Data Sharing Technology
- Professional Ribbon Solution

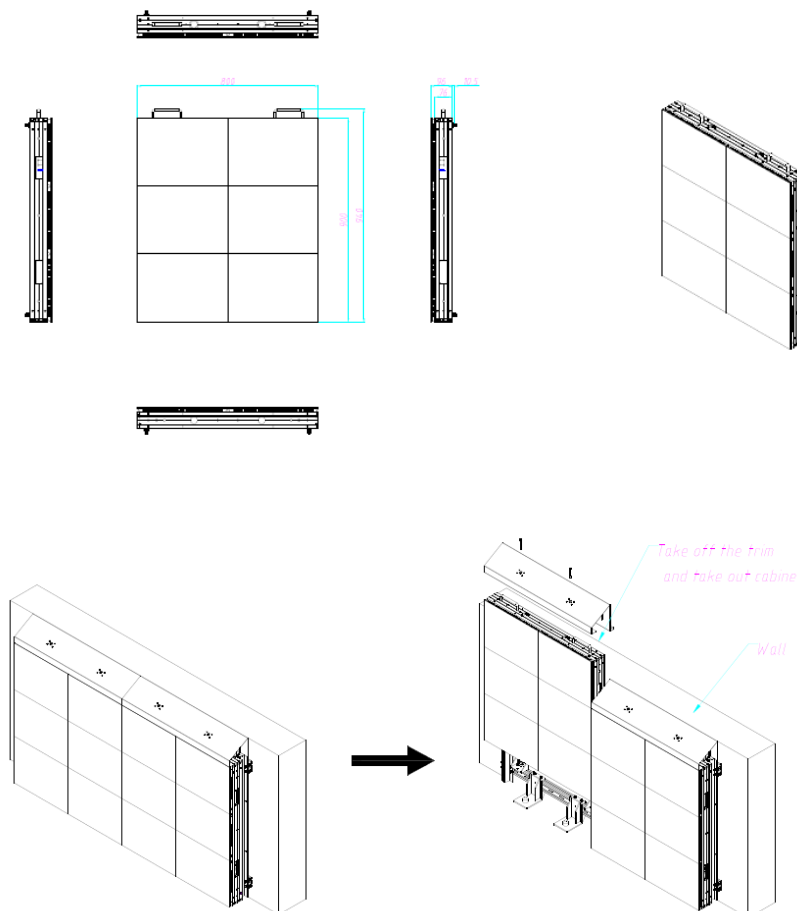

SPECIFICATION PARAMETERS:

Specification		UsportR6
Basic Parameter	Pixel Pitch (mm)	6.67
	Pixel Density (pixels/m ²)	22,500
	Pixel per Panel (dots)	120x135
	Module Size (mm)	W400xH300
	Panel Size (mm)	W800xH900xT106.5
	Aspect Ratio	8:9
	Material	Profile Aluminum
	Panel weight (kg/m ²)	27
	Maintenance Method	Top Maintenance
	Ingress Protection	IP65(Front)/IP54(Rear)
	Environment	Outdoor
Display Parameter	LED Type	3-in-1 SMD
	LED Life Time (Hrs)	100,000
	Brightness of White Balance (cd/m ²)	6,500
	Horizontal Viewing Angle (degrees)	140
	Vertical Viewing Angle (degrees)	120
	Refresh Rate (Hz)	≥3840
	Video Frame Rate (Hz)	50/60
	Gray Scale (bit)	14
	Contrast Ratio	5,500:1
	Color Temperature (K)	2,000~9,500 Adjustable
	Calibration	Support Brightness and Chroma
	Brightness Control	Manual/Automatic
	Operating Voltage	AC 100 V~240 V, 50~60Hz
	Peak Power Consumption (W/m ²)	650

Operation	Average Power Consumption (W/m ²)	217
	Operating Temperature/Humidity	-20°C~+50°C/10~90%RH
Environments	Storage Temperature/Humidity	-30°C~+60°C/10~80%RH
	Standard Mounting Configuration	Fixed

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product;
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.