


UVS Series


UVS10.4 Side Luminous Vanish Screen

Product Features:

- 85% High Transparency
- 5500nits Brightness+3840Hz Refresh Rate
- 12kg/m² Ultra-thin Cabinet
- Single Light Strip Front Maintenance




500

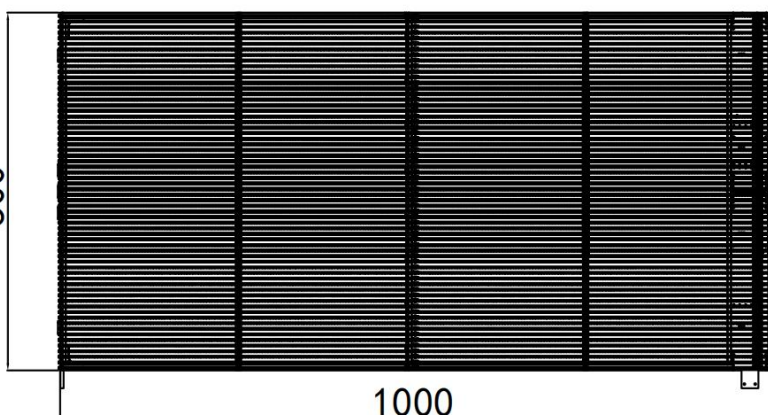

1000

77.65



SPECIFICATION PARAMETERS:

Specification	UVS10.4
Pixel Pitch	10.4-10.4 mm
Material	Profile Aluminium
Transparency	85%
LED Type	1R1G1B
Pixel Density	9216 dot/m ²
Panel Direction	Horizontal
Panel Size	1000 x 500 mm
Pixel Per Panel	96 x 48 dots
Brightness	5500 nits
Gray Scale	14 bit
Refresh Rate	≥ 3840Hz
Weight	12 kg/m ²
Peak Power Consumption	680 W/m ²
Typical Power Consumption	227 W/m ²
Viewing Angle	140°
Installation Method	Lifting/Fixing
Maintenance Method	Front
Ingress Protection	IP30
Operating Temperature/Humidity	-10°C~+45°C/10~85%RH (No Freeze)
Storage Temperature/Humidity	-20°C~+55°C/10~80%RH (No Freeze)

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product;
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.